




■ 品名コード体系 Part Numbering (例 example: 50V 4.7 μF)

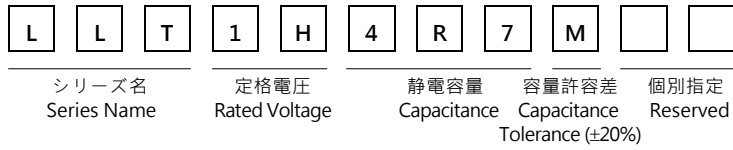

■ 寸法表 Standard Products Table

Cap. (μF)	W.V. Code	10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)	
		0.47	R47								
0.68	R68									5 x 12.5	7
1	1R0									5 x 12.5	10
1.5	1R5									5 x 12.5	16
2.2	2R2									5 x 12.5	23
3.3	3R3									5 x 12.5	30
4.7	4R7									5 x 12.5	35
6.8	6R8									5 x 12.5	45
10	100							5 x 12.5	50	6.3 x 12.5	55
15	150					5 x 12.5	55	6.3 x 12.5	65	6.3 x 12.5	70
22	220			5 x 12.5	60	6.3 x 12.5	70	6.3 x 12.5	80	6.3 x 16	95
33	330	5 x 12.5	65	6.3 x 12.5	80	6.3 x 12.5	90	6.3 x 16	105	8 x 16	130
47	470	6.3 x 12.5	90	6.3 x 12.5	100	6.3 x 16	120	8 x 16	140	8 x 16	155
68	680	6.3 x 12.5	105	6.3 x 16	130	8 x 16	155	8 x 16	170	8 x 20	205
100	101	6.3 x 16	145	8 x 16	180	8 x 16	190	8 x 20	230	10 x 21	280
150	151	8 x 16	195	8 x 16	220	8 x 20	260	10 x 21	310	10 x 26	380
220	221	8 x 16	235	8 x 20	295	10 x 21	350	10 x 26	420	12.5 x 26	500
330	331	8 x 20	320	10 x 21	400	10 x 26	470	12.5 x 26	560	12.5 x 31	660
470	471	10 x 21	430	10 x 26	530	12.5 x 26	620	12.5 x 31	720		
680	681	10 x 26	570	12.5 x 26	700						
1000	102	12.5 x 26	760							Size (mm)	R.C.

Allowable Ripple Current/定格リップル電流 ( mArms ) at 85°C 120Hz

● 許容リップル電流の周波数補正係数 Frequency coefficient of allowable ripple current

Frequency Cap (μF)	50 Hz	120 Hz	300 Hz	1 KHz	10 KHz~
0.47 ~ 47	0.75	1.00	1.35	1.57	2.00
68 ~ 470	0.80	1.00	1.23	1.34	1.50
680 ~ 1000	0.85	1.00	1.10	1.13	1.15